

# GY-Magnets


## Magnets for the GY-series



The GY-series can be adapted with different magnets depending on the application. There are two different shapes; cylindrical and U-shaped. All sensors are delivered with a standard magnet that differs between models. Please see each datasheet for details.

When a different magnet than standard is needed, please refer to the table below. Most magnets with a larger inner diameter than the sensor rod will fit, but please consult us when choosing a special magnet.

Model	Group	Dimensions	Specifications		Dead Zone (mm)
No. $\phi$ SPM (out dia $\phi$ 15)	GG		Material	Polyacetal	
No. $\phi$ LPM (out dia $\phi$ 20)	GG		Weight	No. $\phi$ SPM: 5g No. $\phi$ LPM: 8g	
No. $\phi$ No. $\phi$ M (for GYMTprobe)	B		Material	Polyacetal	
			Weight	6g	
			Install direction	Yes	
inner dia $\phi$ 14 No.2P (black) No.2PN (white) No.2Y (yellow)	B GG GG		Material	Nylon 66 (No.2K(N): bakelite)	
			Weight	10g	
			Install direction	Nil	
inner dia $\phi$ 18 No.2K No.2KN	B GG		Material	Polyacetal	
			Weight	8.1g	
			Install direction	Yes	
No.3	GG		Material	MC nylon	
			Weight	10g	
			Install direction	Nil	
No.11	B		Material	MC nylon	
No.11N	GG		Weight	10g	
			Install direction	Nil	
No.11P	B		Material	MC nylon	
No.11S	GG		Weight	10g	
			Install direction	Nil	
T14-M2	B		Material	Bs	
T14-M4	GG		Weight	140g	
			Install direction	Yes	
T16-M2	B		Material	Bs	
T16-M3	GG		Weight	120g	
			Install direction	Yes	

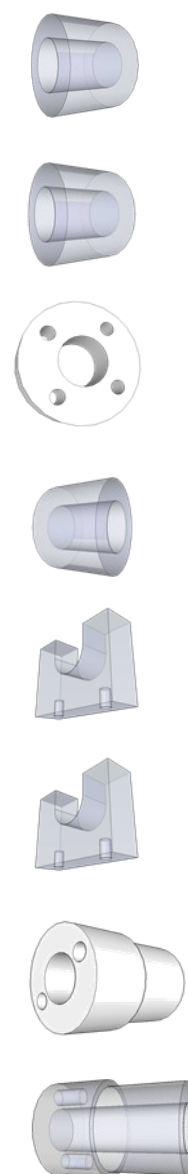

2013-03-13, specifications subject to change without notice

ISO 9001  
BUREAU VERITAS  
Certification



REGAL COMPONENTS AB • LEFFLERSGATAN 1 • SE-754 50 UPPSALA • SWEDEN  
+46 (0)18-65 70 00 • WWW.REGAL.SE • INFO@REGAL.SE

Regal