

MARINE PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The engine and shipbuilding pressure transmitter NAE 8256 features the extremely robust and stable thin-film-on-steel sensor element. The NAE 8256 is the smallest pressure transmitter of its kind with ship approvals. The wide temperature range from -40°C up to +125°C and triple overpressure safety makes it the first choice in rough environments such as marine applications.



Applications

- Shipbuilding
- Engine manufacturing
- Hydraulics

Features

- Measuring accuracy 0.3 %
- Completely welded steel sensor system without additional seals
- High resistance to over pressure
- Excellent long-term stability
- Optional: Switching output 1 or 2 PNP

Technical Data			
Measuring principle	Thin-film-on-steel	Accuracy @ 25°C typ.	0.3 %: ± 0.3 % FS typ.
Measuring range	0 ... 0.2 to 0 ... 700 bar 0 ... 3 to 0 ... 10'000 psi	Media temperature	-40°C ... +125°C
Output signal	4 ... 20 mA, Switching output: 1 or 2 PNP	Ambient temperature	-40°C ... +125°C (cable Radox Tenuis 88: -40°C ... +100°C)
NLH @ 25°C (BSL) typ.	0.3 %: ± 0.2 % FS typ.	Approval / conformity	DNV EU RO Mutual Recognition Type Approval Certificate

05/2022

Data sheet H72305m

Subject to change

Accessories		
Female electrical plug M12x1, 5-pole ⁶⁾		33
Pressure peak damping element \varnothing 0.4 mm		44
Seal FPM, -18°C ... +125°C ²⁾		61
Seal EPDM, -40°C ... +125°C ⁷⁾		63
Seal NBR, -25°C ... +100°C ⁷⁾		83
Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 Ground (only for output signal 19 and male electrical connector 32, M12x1, 4-pole)		E1
Cable length 0.5 m		EM
Cable length 1.0 m		1M
Cable length 2.0 m		2M
Parameterization according to customer specification for output signal PS, T1 (see table "Parameters")		ZC
Parameterization standard for output signal PS, T1 (see table "Parameters")		ZS

¹⁾ Customized pressure ranges upon request

²⁾ Only for pressure connections 17 and 32

⁴⁾ Cable length see accessories

⁵⁾ Only with electrical connections 32 and 88

⁶⁾ For electrical connections 32 and 35

⁷⁾ Only with pressure connection 17 (G1/4")

Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Supply [VDC]	Accuracy @ 25°C typ. [%]
NAE6.0A	8256 77 2317 32 0000 0000 19 33 44 61	0 ... 6	18	9 ... 32	± 0.3
NAE10.0A	8256 78 2317 32 0000 0000 19 33 44 61	0 ... 10	30	9 ... 32	± 0.3
NAE16.0A	8256 79 2317 32 0000 0000 19 33 44 61	0 ... 16	48	9 ... 32	± 0.3
NAE25.0A	8256 80 2317 32 0000 0000 19 33 44 61	0 ... 25	75	9 ... 32	± 0.3
NAE40.0A	8256 81 2317 32 0000 0000 19 33 44 61	0 ... 40	120	9 ... 32	± 0.3
NAE100.0A	8256 83 2317 32 0000 0000 19 33 44 61	0 ... 100	300	9 ... 32	± 0.3
NAE250.0A	8256 74 2317 32 0000 0000 19 33 44 61	0 ... 250	750	9 ... 32	± 0.3
NAE400.0A	8256 84 2317 32 0000 0000 19 33 44 61	0 ... 400	1000	9 ... 32	± 0.3
NAE600.0A	8256 86 2317 32 0000 0000 19 33 44 61	0 ... 600	1500	9 ... 32	± 0.3

Parameters				
Name	Standard setting (accessory ZS)	Value range	Short name	Customer adjustment (accessory ZC)
Switch point SP1 (hysteresis mode) Upper switch point FH1 (window mode)	75 % Measuring range	> RP1, FL1 (2 ... 99 %) Hysteresis \geq 1 % FS	SP1	
Reset point RP1 (hysteresis mode) Lower switch point FL1 (window mode)	25 % Measuring range	< SP1, FH1 (1 ... 98 %) Hysteresis \geq 1 % FS	RP1	
Switch point SP2 (hysteresis mode) Upper switch point FH2 (window mode)	75 % Measuring range	> RP2, FL2 (2 ... 99 %) Hysteresis \geq 1 % FS	SP2	
Reset point RP2 (hysteresis mode) Lower switch point FL2 (window mode)	25 % Measuring range	< SP2, FH2 (1 ... 98 %) Hysteresis \geq 1 % FS	RP2	
Switch point delay time SP1 / RP1 (hysteresis mode) Switch point delay time FH1 / FL1 (window mode)	0	0; approx. 2^x [ms], x = 3, 4 ... 16	dS1	
Switch point delay time SP2 / RP2 (hysteresis mode) Switch point delay time FH2 / FL2 (window mode)	0	0; approx. 2^x [ms], x = 3, 4 ... 16	dS2	
Functions switching output 1	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc)	ou1	
Functions switching output 2	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc) Device ready	ou2	

Parameterization of switching points

The switching points, delay times and output functions can be parameterised quickly and easily with the Sensor Master Communicator (SMC) application, which is available for Windows (PC) and Android smartphone. The Android app is available in the Google Play Store and the Windows app is available in the Microsoft Store. The apps are free of charge.

- Data sheet SMI Sensor Master Interface: www.trafag.com/H72618
- Instruction for the Sensor Master Communicator App (SMC) and the Sensor Master Interface (SMI): www.trafag.com/H73618



Specifications		
Electrical data	Output / supply voltage	4 ... 20 mA: 24 (9...32) VDC 1 or 2 PNP transistors 24 (9...32) VDC
	Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure
	Power-on delay time	100 ms
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	4 ... 20 mA: to $U_{\text{supply}} = 32 \text{ V}$ 1 or 2 PNP transistors: to $U_s = 32 \text{ VDC}$
	Environmental conditions	
	Media temperature	-40°C ... +125°C
	Ambient temperature	-40°C ... +125°C (cable Radox Tenuis 88: -40°C ... +100°C)
	Protection ¹⁾	IP65, IP67, IP68
	Humidity	IEC 60068-2-30 (damp heat, cyclic, 100 % RH @ +55°C)
	Vibration	15 g RMS (20...2000 Hz) 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C)
	Shock	50 g / 11 ms
EMC protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical data	Sensor (wetted parts)	1.4542 (AISI630)
	Pressure connection (wetted parts)	1.4542 (AISI630)
	Housing	1.4301 (AISI304)
	Sealing	FPM/NBR/EPDM
	Male electrical connector	See ordering information
	Weight	~ 50 g
	Mounting torque	25 Nm

¹⁾ See electrical connection

Analogue output


			Sensor 23 (0.3 %)		
			$\geq 0.2 \text{ bar}$ $\leq 0.6 \text{ bar}$	$> 0.6 \text{ bar}$ $< 2.0 \text{ bar}$	$\geq 2.0 \text{ bar}$
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.5	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.8	± 0.6	± 0.3
	NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2	± 0.2
	TC zero point and span	[% FS/K typ.]	± 0.02	± 0.02	± 0.01
	Long term stability 1 year @ +25°C	[% FS typ.]	± 0.3	± 0.2	± 0.1

Switching output


			Sensor 23 (0.3 %)		
			$\geq 0.2 \text{ bar}$ $\leq 0.6 \text{ bar}$	$> 0.6 \text{ bar}$ $< 2.0 \text{ bar}$	$\geq 2.0 \text{ bar}$
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	± 2.0	± 1.5	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.8	± 0.6	± 0.3
	Long term stability 1 year @ +25°C	[% FS typ.]	± 0.3	± 0.2	± 0.1
Setting range of switchpoints	1 ... 99 % FS				
Distance switch point Switch point > reset point	$\geq 1.0 \text{ % FS}$ Switchpoint > reset point				
Switching resistance	$\leq 3 \Omega$				
Output function	Hysteresis, Window; normally closed (NO), normally open (NC)				
Switching current	Ambient and media temperature -40°C ... + 85°C: $\leq 400 \text{ mA}$, total of both switching outputs Ambient and media temperature +85°C ... +125°C: $\leq 200 \text{ mA}$, total of both switching outputs				
Current limiting	integrated				
Lifetime	$> 100 \times 10^6$ cycles				
Delay time	0; ca. $2x \text{ [ms]}$, $x = 3, 4 \dots 16$				
Switching frequency	max. 60 Hz (at switching delay time = 0)				

Measuring accuracy 0.3 %


≥ 0.2 bar ... ≤ 0.6 bar

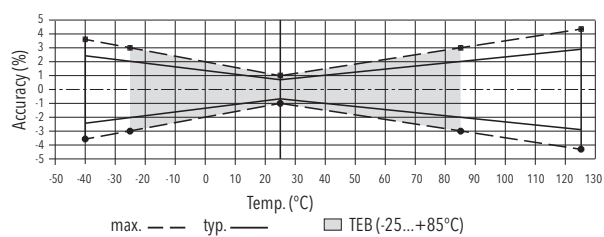


≥ 0.2 bar ... ≤ 0.6 bar

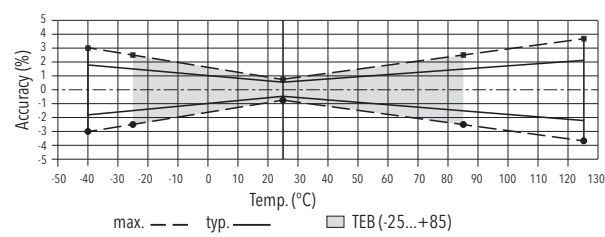


≥ 2.0 bar

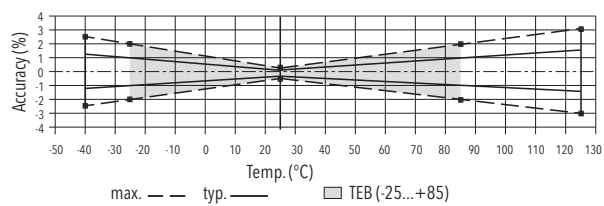


Dimensions

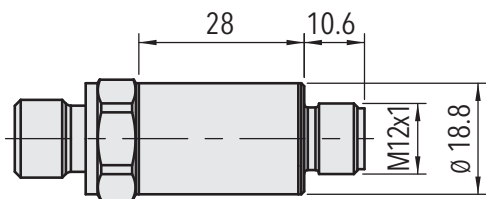


8256.XX.XXXX.32/35.XX.XX

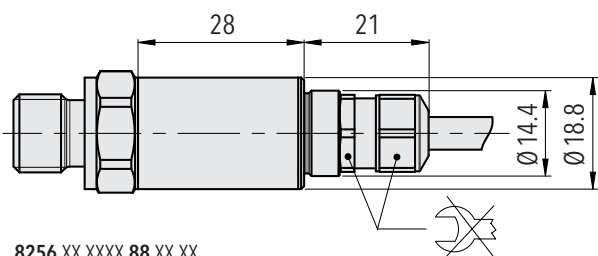


8256.XX.XXXX.88.XX.XX




8256.XX.XX17.XX.XX.XX




8256.XX.XX15.XX.XX.XX




8256.XX.XX53.XX.XX.XX



8256.XX.XX30.XX.XX.XX



8256.XX.XX32.XX.XX.XX



8256.XX.XXXX.XX.XX.33

Electrical connection



		Protection / electrical connection																											
		IP65, IP67 ^{1) 2)}		IP65, IP67, IP68 ^{2) 3)}																									
		M12x1		Cable																									
		4-pole 32	5-pole 35	88																									
Output signal	<p>8256.xx.xxxx.xx.19</p>	<p>E1</p> <table border="1"> <tr><td>1</td><td>1</td><td>4</td><td>brown</td></tr> <tr><td>3</td><td>2</td><td>1</td><td>black</td></tr> <tr><td>4</td><td>4</td><td>5</td><td>yellow / green</td></tr> </table>	1	1	4	brown	3	2	1	black	4	4	5	yellow / green															
	1	1	4	brown																									
3	2	1	black																										
4	4	5	yellow / green																										
	<p>8256.xx.xxxx.xx.PS/T1</p>	<table border="1"> <tr><td>PS</td><td>T1</td><td></td><td>PS</td><td>T1</td></tr> <tr><td>1</td><td>1</td><td></td><td>brown</td><td>brown</td></tr> <tr><td>4</td><td>4</td><td></td><td>blue</td><td>blue</td></tr> <tr><td>2</td><td>-</td><td></td><td>yellow / green</td><td>-</td></tr> <tr><td>3</td><td>3</td><td></td><td>black</td><td>black</td></tr> </table>	PS	T1		PS	T1	1	1		brown	brown	4	4		blue	blue	2	-		yellow / green	-	3	3		black	black		
PS	T1		PS	T1																									
1	1		brown	brown																									
4	4		blue	blue																									
2	-		yellow / green	-																									
3	3		black	black																									

¹⁾ Provided female electrical plug is mounted according to instructions

²⁾ Ventilation via male electric plug/cable end


³⁾ IP68, 20 bar, 30 min.

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

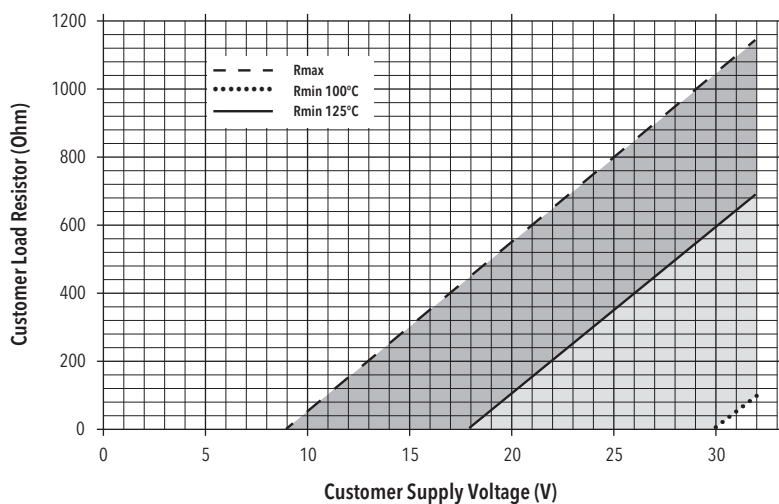

Connection of loads to switching output

Functions switching output

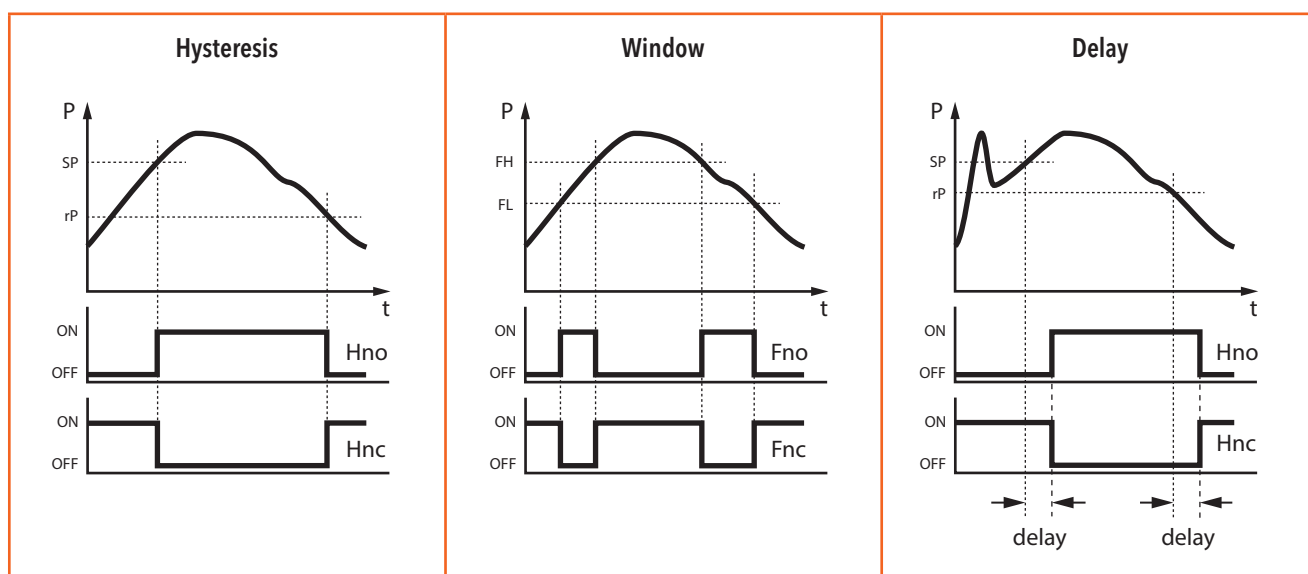

Additional information

Documents

Data sheet	www.trafag.com/H72305
Instructions	www.trafag.com/H73303
Flyer	www.trafag.com/H70684