

GAS DENSITY MONITOR WITH SWITCHING CONTACTS

Swiss based Trafag offers precise, reliable and maintenance-free instruments developed for density monitoring of SF₆ and related alternative gases. Monitoring is based on the gas density reference principle. Thus offering the most reliable solution on the market by directly monitoring the insulating gas density.



Applications

- High voltage technology
- Medium voltage technology
- SF₆ and variety of alternative mixed gases

Features

- Exact switching output at all temperatures
- No contact bouncing
- Independent, galvanically separated switching circuits
- Suitable for outdoor and indoor applications
- Maintenance free

11/2022

Data sheet H72511s

Technical Data

Measuring principle	Absolute pressure reference gas measuring system	Quantity of switchpoints	1 ... 4 microswitches
Measuring range	0 ... 1100 kPa abs. @ 20°C	Dial	Scale and units selectable
Output signal	Floating change-over contact (SPDT)	Ambient temperature	-40°C ... +80°C

Subject to change

Ordering information/type code

		XXXX	XX	XXXX	XX	XX	XX
Custom build code	Gas density monitor with microswitches	87X6					
	One microswitch	8716					
	Two microswitches	8726					
	Three microswitches	8736					
	Four microswitches	8746					
Monitor wire terminal block	Standard wire terminal	20					
Pressure connection	Threaded, axial and radial types			1XXX			
	Flanged and cap nut, axial and radial types			2XXX			
	Compartment immersion types			5XXX			
Code number	Determined by Trafag					XX	
Options	Basic density indicator dial with two colour sectors without markings						60
	Density indicator dial with scale according to customer specification						61
	Low pressure indicator						66
	Process gas wetted O-rings composed of IIR						C2
	Microswitch outlet						
	EMC-cable gland M20x1.5, brass nickel-plated, for cable-ø 7 ... 12.5 [mm]						10
	EMC-cable gland M20x1.5, brass nickel-plated, for cable-ø 8 ... 11 [mm]						07
	EMC-cable gland M20x1.5, brass nickel-plated, for cable-ø 11 ... 14 [mm]						08
	EMC-cable gland M25x1.5, brass nickel-plated, for cable-ø 8 ... 16 [mm]						11
	EMC-cable gland M25x1.5, brass nickel-plated, for cable-ø 12.5 ... 20.5 [mm]						17
	ITT Cannon connector						12
	Blank plug M20x1.5, brass nickel-plated ¹⁾						13
	Blank plug M25x1.5, brass nickel-plated ¹⁾						04
	Blank plug M25x1.5, PA ^{1) 2)}						05
	Process gas damping element ³⁾						49
	Integrated density monitor test valve for DN8 coupling with M26x1.5 protective cap						
	Standard test port orientation						W3
	Test port orientation 180°						W0
	Test port orientation 270°						W1
	Test port orientation 90°						W2
	Integrated process gas test and re-filling valve for DN8 coupling with M26x1.5 protective cap						
	Standard filling port orientation						F3
	Filling port orientation 180°						F0
	Filling port orientation 270°						F1
	Filling port orientation 90°						F2
Accessories	Thermal insulation ring for probe housing						06
	Thermal foam cover with drain holes						37
	Weather protection cover						46
	Pressure connection adapter 2300 - G1/2" male						N1

¹⁾ Select if EMC-cable gland is procured locally²⁾ Without IP compatibility, not for use in operation³⁾ Available with pressure connections 2000, 2001, 2045

Further customised parameterisation to be indicated

Process gas	SF ₆ , SF ₆ -based mixed gas, customer specific alternative gas
Variety of units for density dial	kPa, bar, MPa (abs., rel. ¹⁾), psi (a., g. ¹⁾), kg/m ² , kg/cm ² , also dual units available
Switchpoint @ 20°C ²⁾	Microswitch 1, p= xxx
	Microswitch 2, p= xxx
	Microswitch 3, p= xxx
	Microswitch 4, p= xxx

¹⁾ Monitoring principle is based on absolute pressure reference system and is accordingly calibrated. While using relative dial units, local ambient pressure (e.g. altitude or weather derivations) has to be considered if comparing to local installed relative pressure gauges

²⁾ Factory setting for decreasing or increasing pressure available

Specifications

Mechanical density monitoring	Monitoring principle	Absolute pressure measuring system with sealed reference gas chamber, fully temperature compensated by design ²⁾
	Monitoring range	0 ... 1100 kPa abs. @ 20°C
	Monitoring output	Floating change-over contact (SPDT)
	Quantity of switchpoints	1 ... 4 microswitches
	Monitoring accuracy	Refer to density indicator and microswitch sections
Environmental conditions	Ambient temperature	-40°C ... +80°C
	Protection ¹⁾	IP65 and IP67
	Humidity	IEC 60068-2-30 (damp heat, cyclic, 100 % RH @ +55°C), membrane provides condensation compensation
	Overpressure	1300 kPa abs.
	Shock	70 g / 3 ms / 10'000 times at all axes excited on process connection without damage to instrument
	Routine inspection of gas tightness	Integral pressure testing with 6 bar rel. helium, SF ₆ leakage rate less than 1·10 ⁻⁸ mbar · l/s
Mechanical data	Process gas wetted material	Process connection and measuring system: 1.4404, 1.4435, 1.4571 (AISI316L, AISI316Ti) Test and re-filling valve: 1.4404 (AISI316L), CuZn39Pb3 (C38500) Sealing: EPDM ³⁾ , IIR as option
	Housing	AlSi10Mg, powder coated
	Screwed cable gland	Brass nickel plated, PA as option
	Dial	Dial face and pointer: Aluminium sheet Window: PMMA
	Weight	Gas density monitor: ~ 800 ... 1000g Gas density monitor with integrated test or re-filling valve ~ 1100 ... 1300 g

¹⁾ While using appropriate cable gland and/or mating connector mounted according to instruction

²⁾ Depending on process gas requirements, the fully sealed reference gas chamber contains up to 0.001kg of SF₆. The relevant national regulations governing the disposal of hazardous waste apply and must be followed. Decommissioned or defective monitors can be returned to the manufacturer for disposal in a safe and environmentally appropriate manner



³⁾ SF₆ qualified

Density indicator		
	Main dial	Low pressure indication option
Indicator principle	Absolute pressure, fully temperature compensated by means of sealed reference gas chamber	Indication of relative pressure, for safety reason it is not temperature compensated
Scale	Colour sectors (standard red/yellow/green or red/green), switchpoint markings, single or dual units	Single unit, graduated range
Unit	Optional kPa, bar, MPa (abs., rel. ¹⁾), psi (a., g. ¹⁾), kg/m ² , kg/cm ² , customer specific units available	According to main dial unit (rel., g.)
Numbered range	Up to 180 kPa @ 20°C between lowest and highest indicated value ²⁾	Vacuum up to lowest switchpoint, 500 kPa rel. max.
Accuracy within numbered range	± 10 kPa @ 20°C	Up to 200 kPa rel.: ± 20 kPa Up to 500 kPa rel.: ± 10% MV


¹⁾ Monitoring principle is based on absolute pressure reference system and is accordingly calibrated. While using relative dial units, local ambient pressure (e.g. altitude or weather derivations) has to be considered if comparing to local installed relative pressure gauges

²⁾ Typically ranges are from lock-out switchpoint to filling pressure (no high-alarm), or from lock-out switchpoint to high-alarm switchpoint


Gas density monitor with main dial and low pressure indicator in standard orientation (electrical connection in 6 o'clock position)

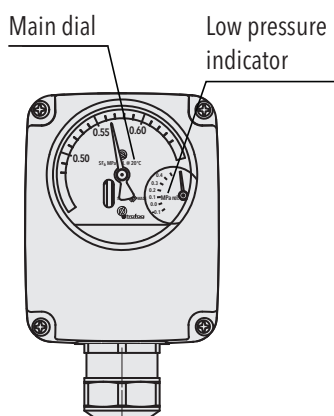

87x6.XX.XXXX.XX.60.XX.XX



87x6.XX.XXXX.XX.60.61.XX




87x6.XX.XXXX.XX.60.61.66.XX


Density indicator dial according to customer specification

Availability of a full variety of units including dual range indication, this also includes dial rotated by 90°/180°/270°.


Customised dial orientation based on electrical connection position

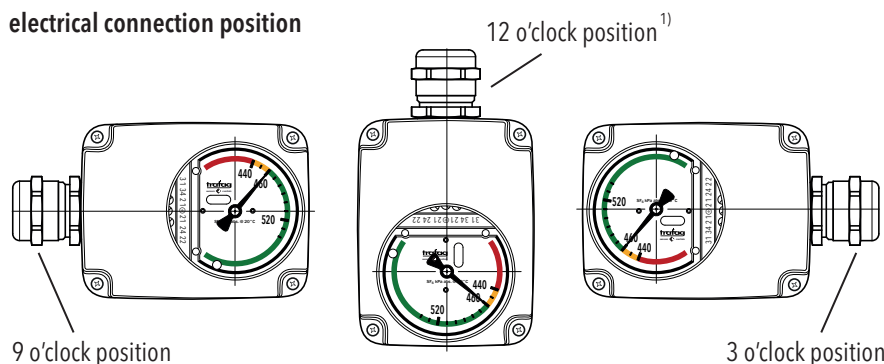


Gas density monitor without indication dial



87x6.XX.XXXX.XX.XX.XX



Lowest switchpoint setting:
120 kPa abs. @ 20°C,
distance from lowest to highest
switchpoint: up to 180 kPa @ 20°C



Highest switchpoint setting:
1000 kPa abs. @ 20°C,
distance from lowest to
highest switchpoint:
up to 180 kPa @ 20°C

¹⁾ Should only be used for indoor applications while using neither a weather protection cover nor a thermal foam cover

Microswitch and switchpoint		
Microswitch	Output signal	Floating change-over contact (SPDT)
	Resistive load (Inductive load)	AC - 250 V/10 (1.5) A DC - 250 V/0.1 (0.05) A, 220 V/0.25 (0.2) A, 110 V/0.5 (0.3) A, 24 V/2 (1) A
	Resistance of insulation	>100 MΩ, 500 VDC, ex factory
	Dielectric strength	2 kVAC, 50Hz, terminal to ground (earth)
	Switching cycle capacity	Up to 1 Mio. mechanical, more than 10'000 with maximum load
	Effect of vibration	4 g / 20...100 Hz effects no contact bounce at 5 kPa minimum distance from set switchpoint
Switchpoint setting	Factory adjustment	According to customer specification, ¹⁾ standard setting is for decreasing pressure
	Lowest switchpoint setting	120 kPa abs. @ 20°C
	Highest switchpoint setting	1000 kPa abs. @ 20°C
	Distance from the lowest to the highest switchpoint ²⁾	Up to 180 kPa @ 20°C
	Switching differential	3 ... 7 kPa typ. (15 kPa max.) if lowest to highest switchpoint distance is up to 130 kPa 5 ... 10 kPa typ. (20 kPa max.) if lowest to highest switchpoint distance is 130 ... 180 kPa

¹⁾ Especially in areas with high daily temperature fluctuations it is recommended to maintain a minimum switchpoint distance of 40-60 kPa from filling pressure to surrounding switchpoint(s). Please contact us for more information

²⁾ Distance from lock-out to high-alarm pressure, or from lock-out to filling pressure (no high-alarm)

Switchpoint accuracy				
		+20°C	-30°C ... +50°C	-40°C ... +60°C
First alarm switchpoint setting pressure abs. @ 20°C ¹⁾				
≤ 650 kPa	[kPa max.]	± 8	± 10	± 12
> 650 kPa	[kPa max.]	± 8	± 12	± 14
High pressure alarm ^{1) 2)}	[kPa max.]	± 10	± 16	± 20

¹⁾ While no liquefaction occurs and the insulation gas is completely gaseous

²⁾ Only applicable if factory adjustment includes high-alarm switchpoint above filling pressure


Additional information		
Documents	Data sheet	www.trafag.com/H72511
	Instructions	www.trafag.com/H73511
	Flyer	www.trafag.com/H71103

Electrical connections


Standard wiring terminal

87x6.20.XXXX.XX.XX.XX.XX

Number of microswitches according to customer application

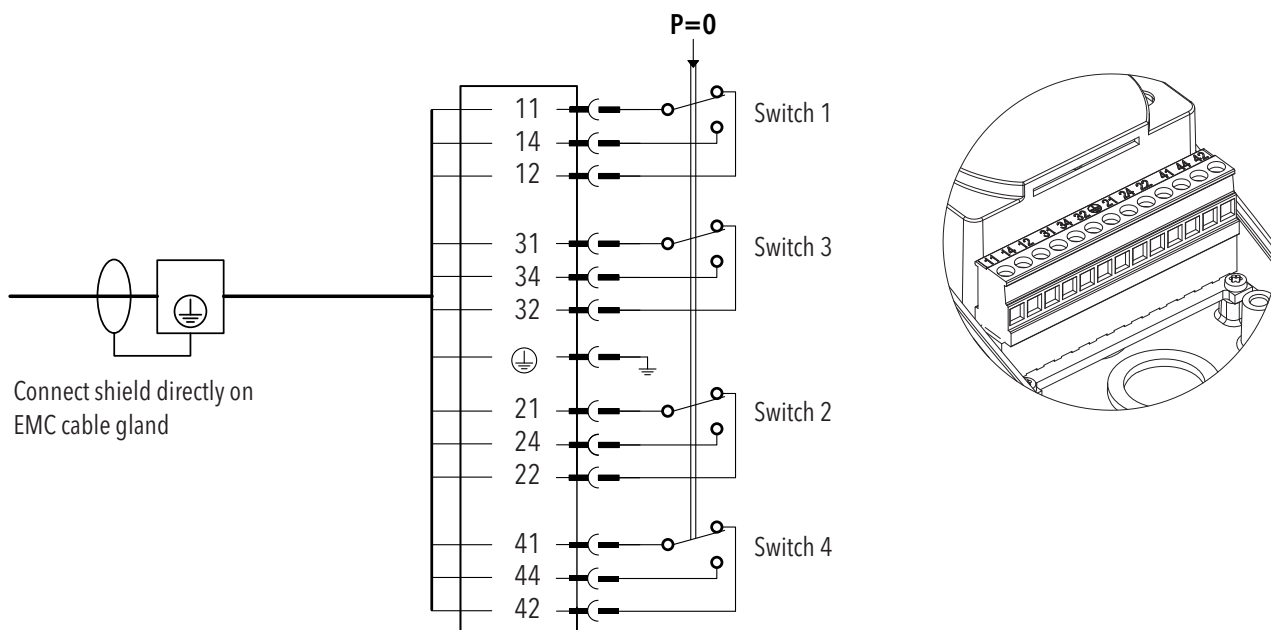

Microswitch in non-pressurised condition (p=0)

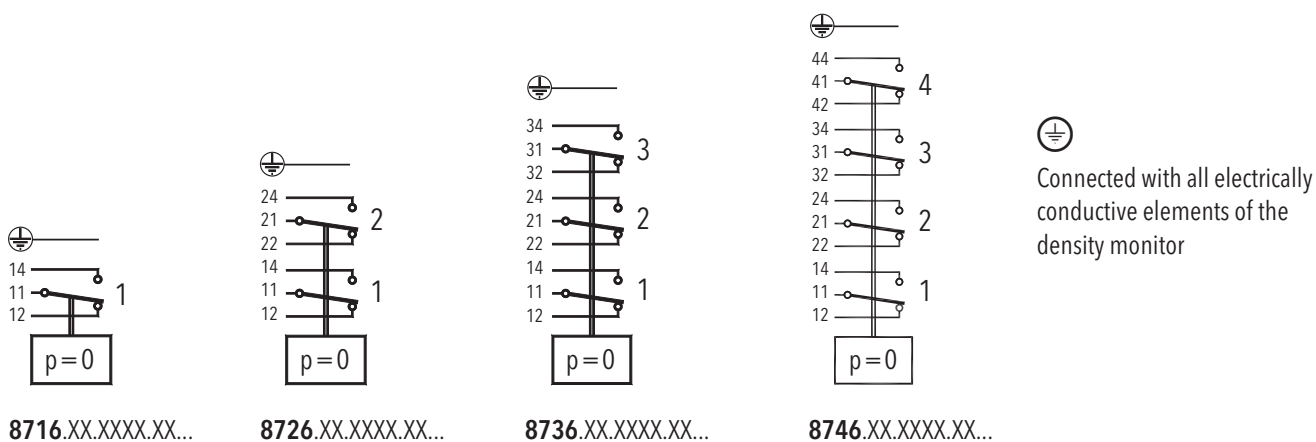


Instruction: www.trafag.com/H73511

Electrical connections

Connections for microswitch


EMC-cable gland	See ordering information
Wire terminal	Plugable, 0.2 ... 2.5 mm ² , 13-pins
Connector option	ITT Cannon

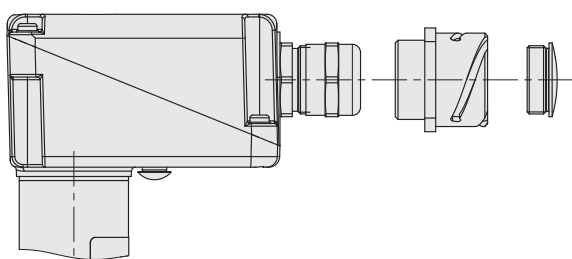

Microswitch connection either with EMC-cable gland, ITT Cannon connector or closed with blank plug.

Electrical connection


EMC-cable gland ¹⁾



87x6.XX.XXXX.XX.XX.XX

Type code 07 ... 17,
see ordering information

ITT Cannon connector ²⁾³⁾



87x6.XX.XXXX.XX.12.XX.XX

Blank plug ¹⁾



87x6.XX.XXXX.XX.XX.XX

Type code 04 ... 13,
see ordering information

¹⁾ IP 65 and IP 67 protection, exceptions are indicated in ordering information/type code



²⁾ IP 65 and IP 67 protection while using an equivalent mating connector mounted according to instruction

³⁾ Please contact us for standard pin-out and more details. Monitor internal wiring provided.

Sheltering options are limited to weather protection cover (46) and/or thermal insulation ring (06) for probe housing


Main dimensions of density monitor

Example model with axial process connection and cap nut

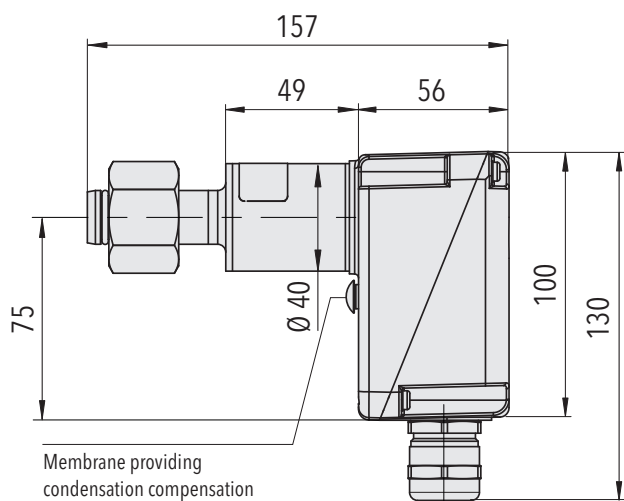


87x6.20.2XXX.XX.XX.XX.XX

Example model with radial process connection

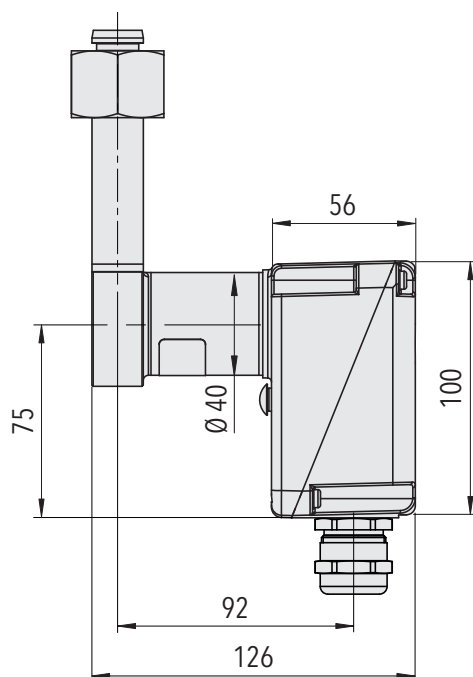


87x6.20.2XXX.XX.XX.XX.XX

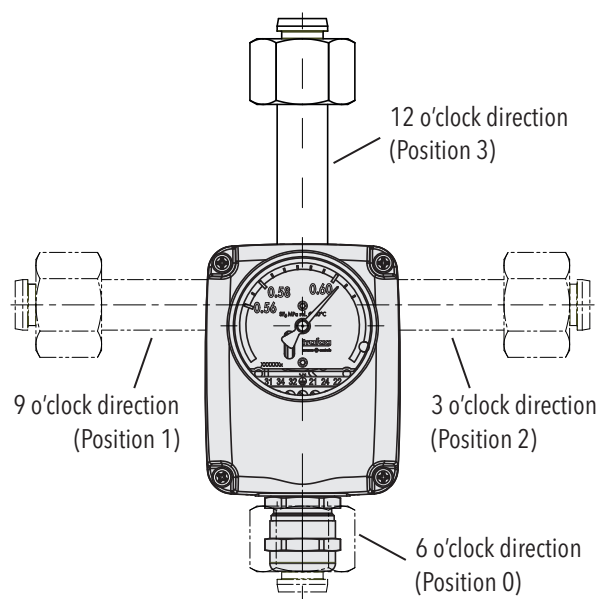

Radial process connection is configurable for 12/3/6/9 o'clock direction







Installation and sheltering options

Installation			
	Indoor application	Outdoor application	Outdoor application with rapidly changing or extreme weather conditions
Installation orientation	No limitations, any orientation possible	A, B, C ¹⁾	A, B, C ¹⁾
Recommended option	None	<ul style="list-style-type: none"> ■ Weather protection cover (46) ■ Thermal insulation for probe housing (06) 	<ul style="list-style-type: none"> ■ Thermal foam cover (37) ■ Compartment immersion type process connection (5XXX)

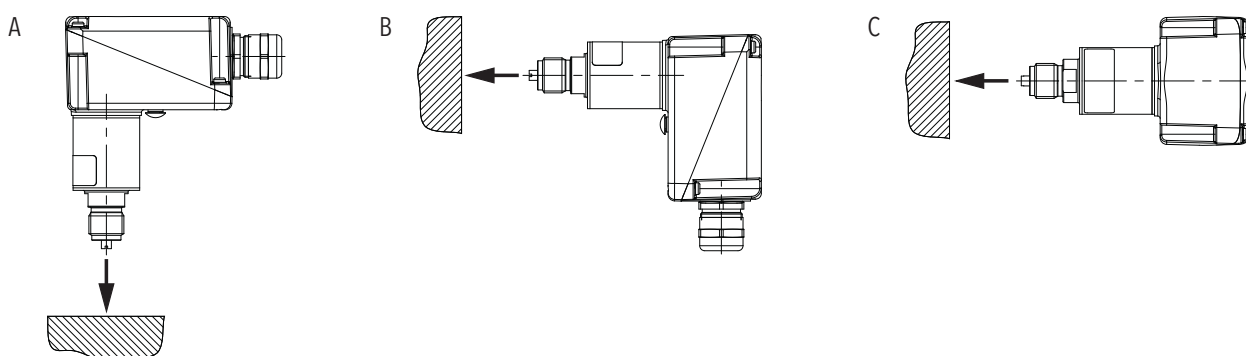

¹⁾ Or any orientation in between. A vertical upside down installation shall be avoided

Installation and sheltering options

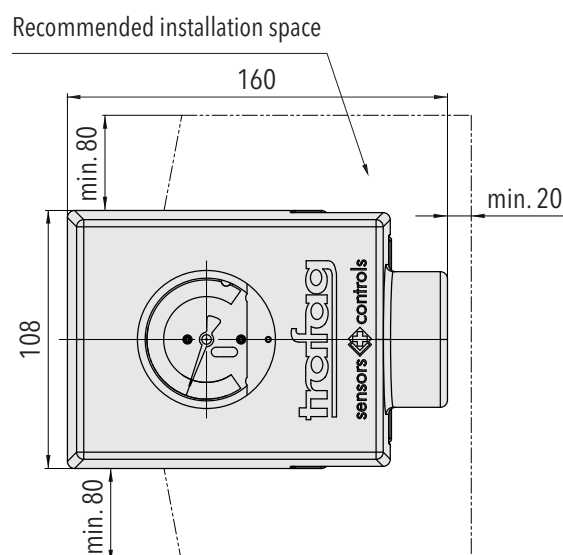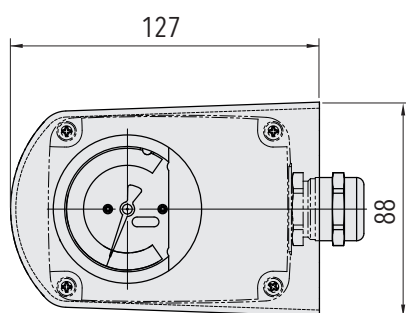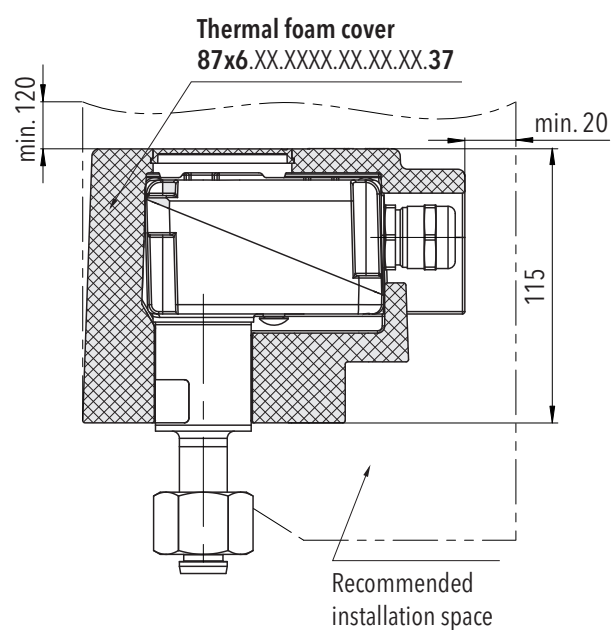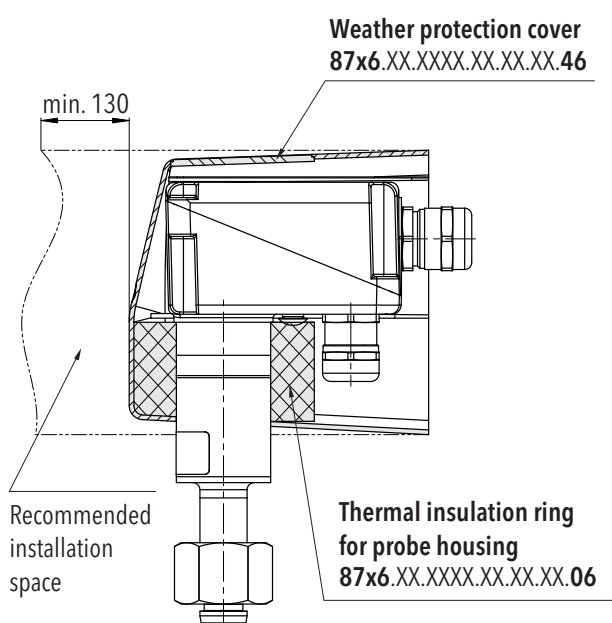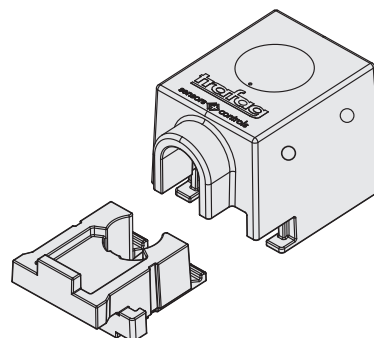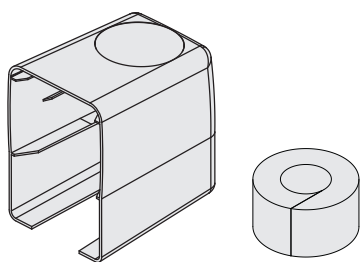


Weather protection cover (46) is aimed for long-term element protection. Insulation ring (06) for probe housing increases thermal inertia in moderate climates. Probe housing refers to the lower part of the monitor where the reference chamber is located.

Foam cover (37) increases thermal inertia of the density monitor. It is recommended in locations with high solar radiation or daily temperature fluctuations (high altitude, arctic, desert).

Installation and sheltering options

Compartment immersion process connection

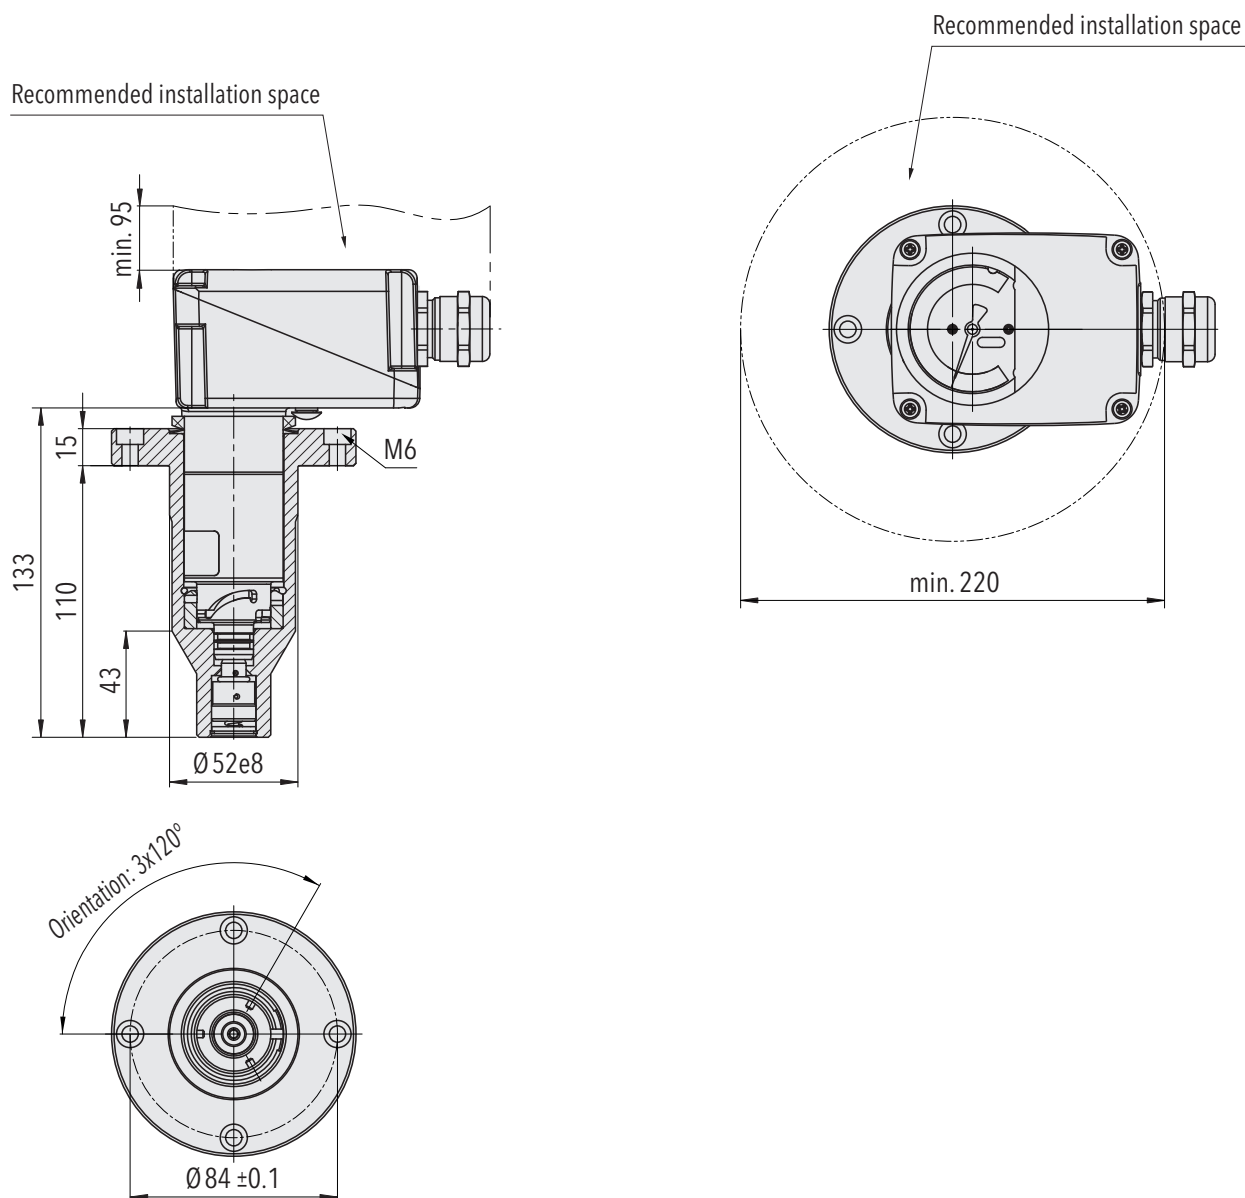

87x6.XX.5XXX.XX.XX.XX.XX


The in-compartment installation (5xxx) is aimed to match process gas and monitor probe temperature. Bayonet fitting allows installation while process is pressurised.




Further details see datasheet: www.trafag.com/H72502

Process connections


Axial process connections




87x6.XX.1000.XX.XX.XX.XX
Axial threaded connection G1/2"




87x6.XX.1120.XX.XX.XX.XX
Axial threaded connection M20x1.5

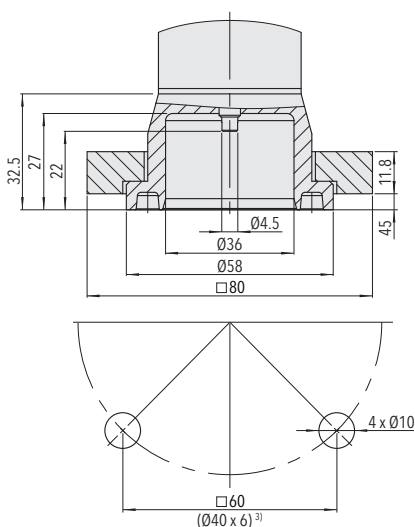


87x6.XX.2000.XX.XX.XX.XX
Axial flanged connection

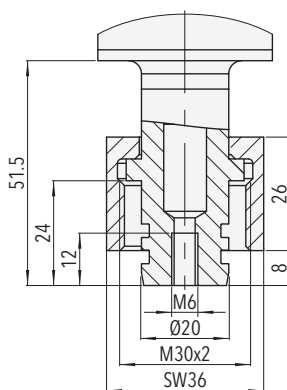


87x6.XX.2300.XX.XX.XX.XX
Axial cap nut connection

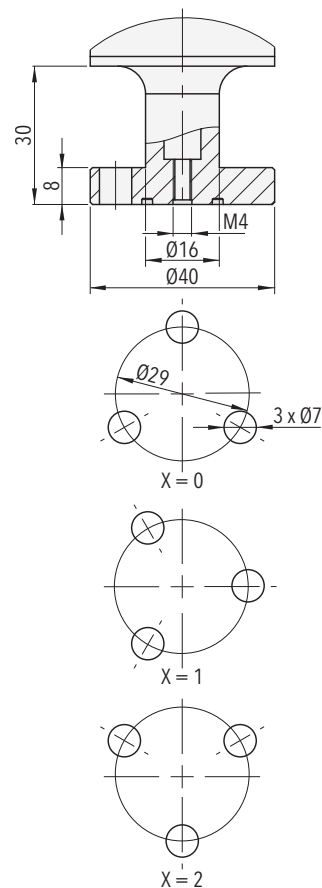

87x6.XX.220x.XX.XX.XX.XX
Axial flanged connection




87x6.XX.2550.XX.XX.XX.XX
Axial connection DN8

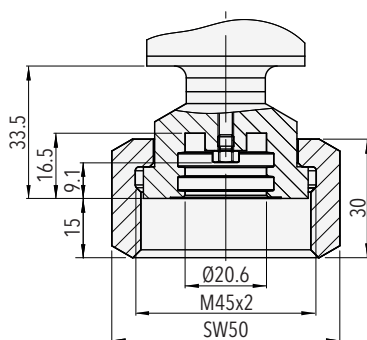

87x6.XX.2570.XX.XX.XX.XX
Axial connection DN20


Process connections

Radial process connections

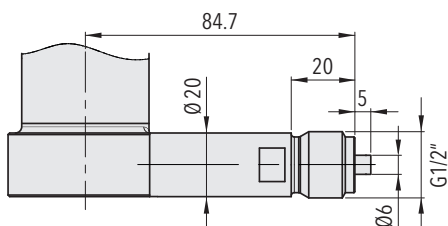


87x6.XX.1030.XX.XX.XX.XX

Radial threaded connection G1/2"

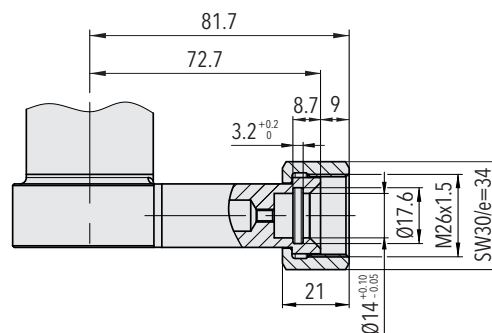


87x6.XX.2XE2.XX.XX.XX.XX

Radial connection DN8

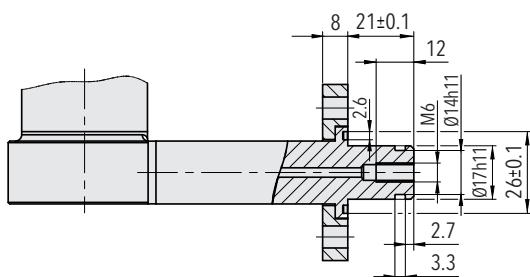


87x6.XX.2XP2.XX.XX.XX.XX

Radial for two-hole flange connection



Adapter

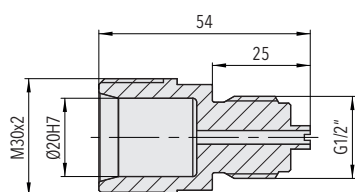

87x6.XX.2300.XX.XX.XX.N1

Adapter 2300 - G1/2" male for rotatable G1/2" pressure connection




Delivery includes assembly kit and O-Ring set where applicable.

For full range of process connections and more details see data sheet www.trafag.com/H72502.

Valve options


Integrated density monitor test valve

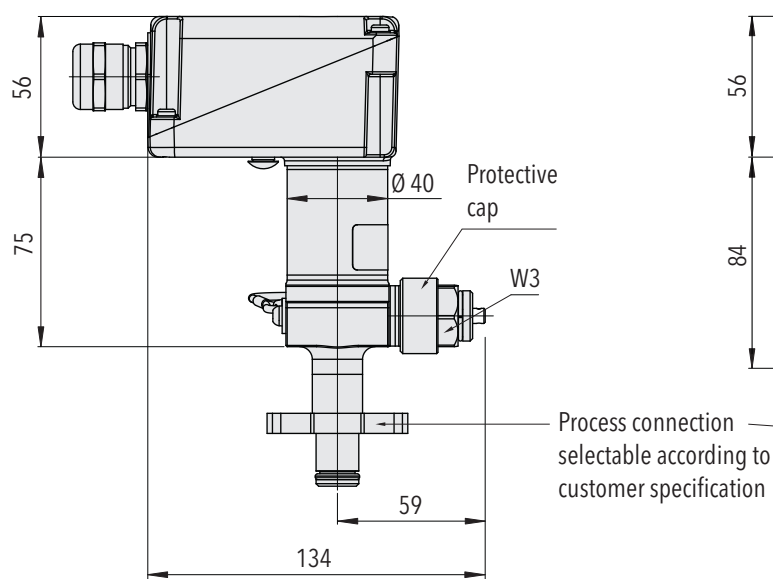

87x6.XX.XXXX.XX.W0/W1/W2/W3.XX.XX

Test valve allows in-situ monitor verification without dismantling from pressure compartment. Test equipment is connected via DN8 port. Connection is configurable for direction W0/W1/W2/W3.

Integrated process gas test and re-filling valve


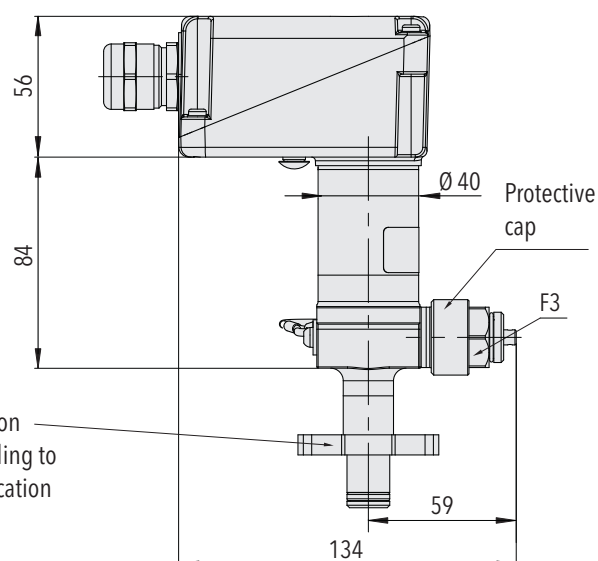


87x6.XX.XXXX.XX.F0/F1/F2/F3.XX.XX

Valve allows in-situ analyzing of gas quality and direct insulating gas replenishment of pressure compartment via DN8 port on re-filling valve. Connection is configurable for direction F0/F1/F2/F3.

Orientation service connection (top view) ¹⁾

please specify when ordering

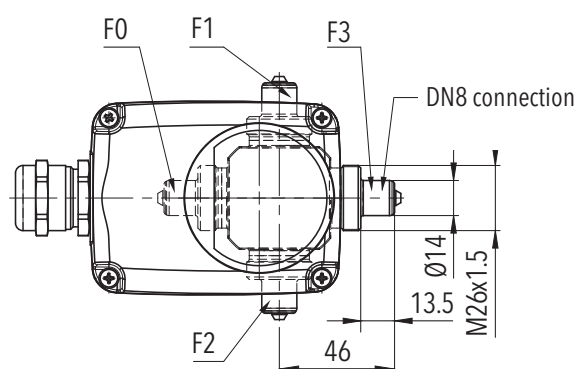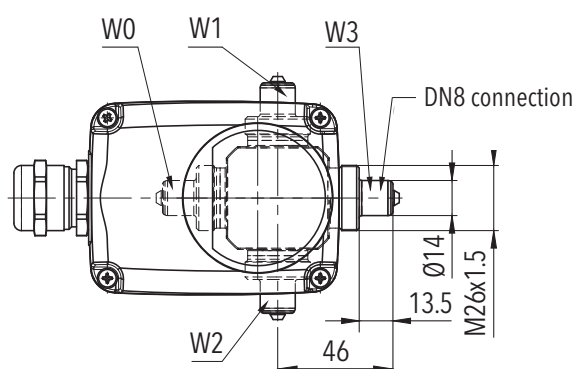

¹⁾ While using weather protection cover or thermal foam cover, the indicated installation spaces should be followed. See section installation and sheltering options


Operating specification for test and re-filling valve:

Opening and closing shall be limited to temperature range of -25°C ... +50°C.
Mechanical lifetime min. 250 actuation cycles.




For more details see instruction: www.trafag.com/H73521


Spare parts




Standard microswitch wire terminal, 13-pins ¹⁾




Housing cover with dial window ²⁾




Housing cover without dial window ²⁾




Weather protection cover
(Trafag part no.: C16354)



Thermal insulation ring for probe housing
(Trafag part no.: D34570)

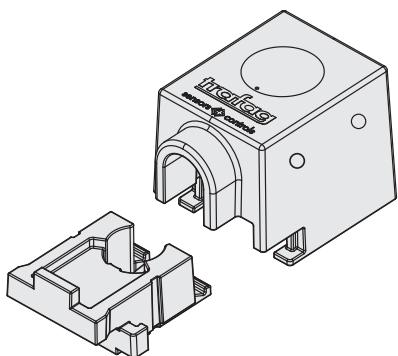


Thermal foam cover with drain holes
(Trafag part no.: C16421)



2 x O-Ring EPDM mounted inside

M26x1.5 protective cap for test and re-filling valve
(Trafag part no.: C30645)



Pressure connection adapter 2300 - G1/2" male
(Trafag part no.: C30931)

¹⁾ Please contact us for more details.

²⁾ Please identify if microswitch cable outlet is required. For options see ordering information